



## Particular Features


Operation by hand installation.

Easy installation with single-hole mounting.

Absorbs shock and vibration.

Ideal for sheet metal panel applications.

Delivery: spring and clip assembled, handle packed separately.

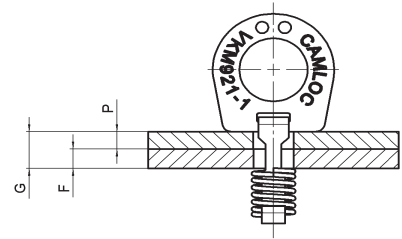

VKM1040-1AGV

VKM921-1AGV

$G = P + F$

Gmax. = 6mm

Gmin. = 1mm


$G = P + F$

Gmax. = 6,35mm

Gmin. = 1,5mm

Product	Dimensions	Materials / Finish	°C	Part No.
<p><b>folding handle</b></p>		Steel / zinc-plated, CrVI-free transparent, iricedent passivated and sealed	120	<b>VKM921-1AGV</b>
<p><b>folding handle</b></p>		Steel / zinc-plated, CrVI-free transparent, iricedent passivated and sealed	120	<b>VKM1040-1AGV</b>

## Installation Instructions

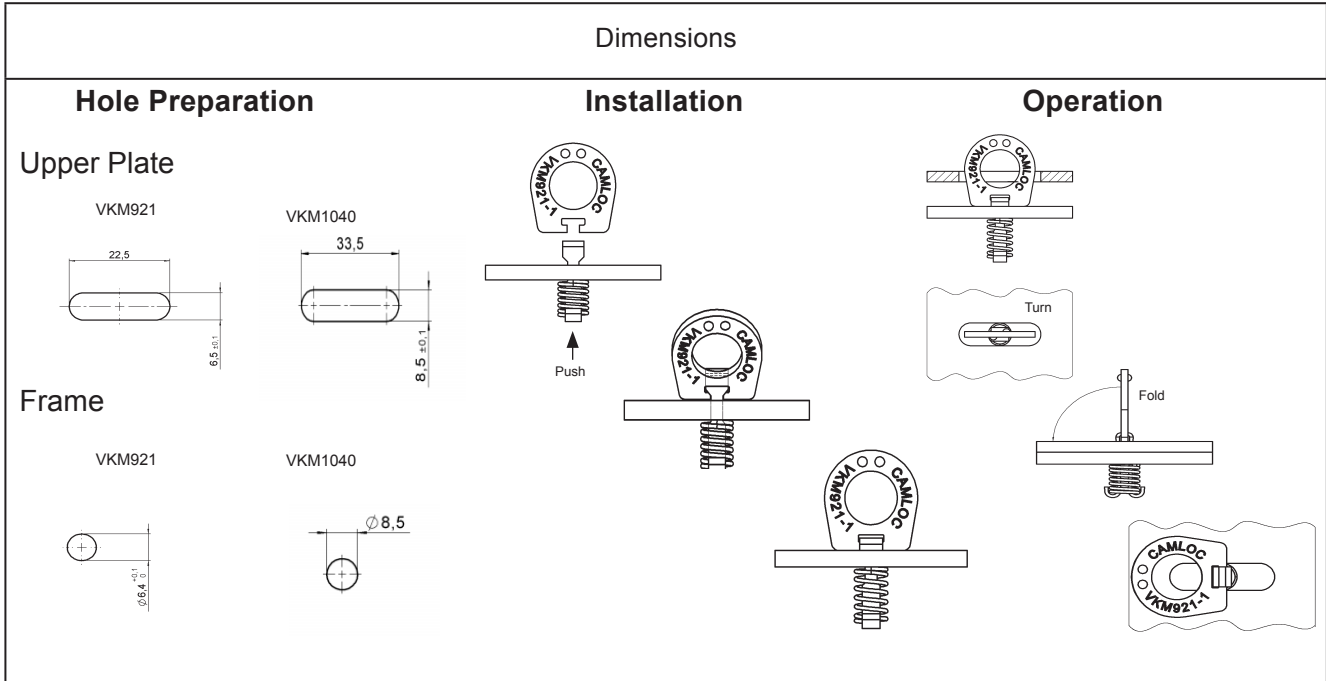

YouTube Video:

