


REV	DESCRIPTION	DET	DATE
L	HPHY2-001 #8 118944-3, ADD'D DUAL DIMENSIONING, D-SIDE #88 C-517	JUC	01/10/19
M	CORRECTED 9, 10 HANDLE NUMBERING	SMW	03/24/20

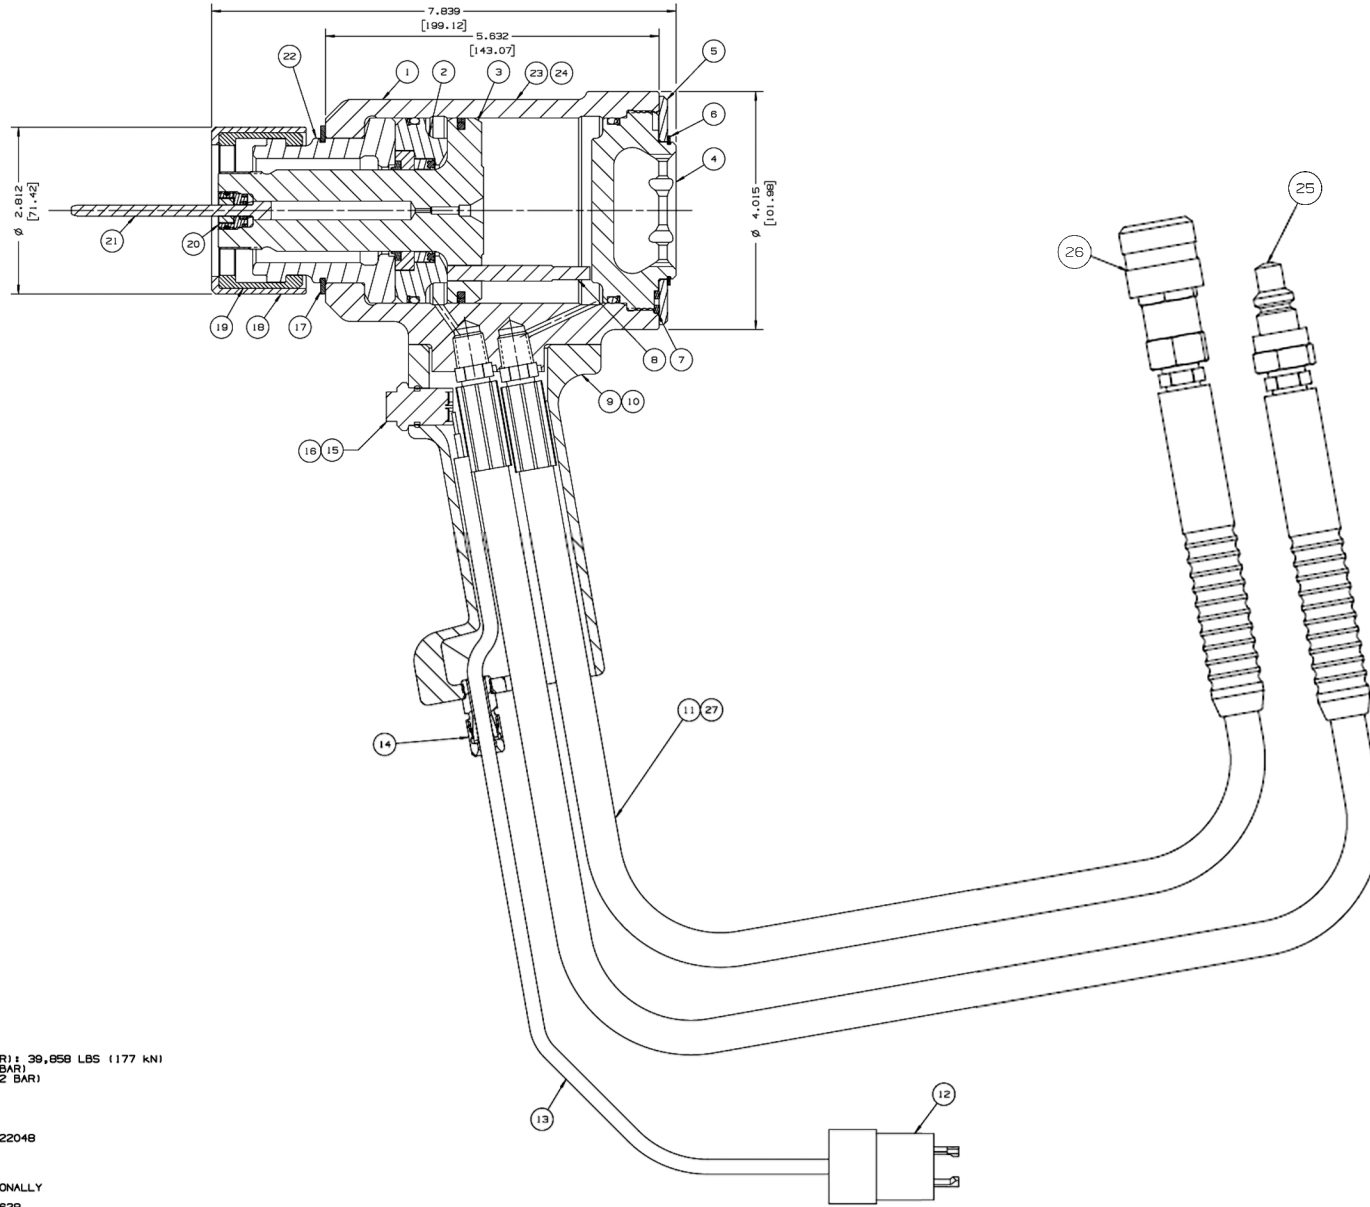

NOTES:

- STROKE: 1.812 INCHES (4.6 CM)
PULL CAPACITY AT 6500 PSI (448 BAR): 39,858 LBS (177 kN)
MAX PULL PRESSURE: 7400 PSI (510 BAR)
MAX RETURN PRESSURE: 2200 PSI (152 BAR)
WEIGHT: 19 lbs (8.62 Kg)
- ASSEMBLE AND TEST PER HUCK
SPEC 42-571
- SHIP WITH EJECTOR GLAND HEX KEY 122048
AND END CAP HEX KEY 126981
- SERVICE KIT 3585KIT AVAILABLE
- ASSEMBLY TOOL KIT 123110-12, OPTIONALLY
AVAILABLE, CONSISTS OF:
GLYO RING INSERTION TOOL 121894-2628
PISTON ASSEMBLY TOOL 123111-7
SPACER 123112-7
- REMOTE TRIGGER 123381 OPTIONALLY
AVAILABLE

505839	1	CABLE TIE (NOT SHOWN)	27
110439	1	FEMALE CONNECTOR	26
110438	1	MALE CONNECTOR	25
590501-7400	1	STICKER WARNING/CE	24
590517	1	TRADEMARK & YEAR	23
128475	1	NOSE ADAPTER	22
128742	1	PINTAIL EJECTOR	21
120453	1	EJECTOR GLAND ASSY	20
100247	1	SPLIT RING	19
100248	1	SLEEVE	18
501030	1	RETAINING RING	17
501731	1	SET SCREW	16
120361	1	TRIG. SWITCH ASSY	15
505344	1	STRAIN RELIEF	14
128705	1	CONTROL CORD	13
110486	1	CORD CONNECTOR	12
HPHY2-BC01	2	HOSE - 24"	11
500102	4	SCR SOC CAP #10-32 X .62	10
129789	1	HANDLE, ALUMINUM, 3585	9
126198	1	DUMP VALVE	8
129198	1	LOCKING DISK	7
507418	1	RETAINING RING	6
129196	1	COVER PLATE	5
126203	1	END CAP ASSY	4
128777	1	PISTON ASSY	3
128776	1	GLAND ASSY	2
128473	1	CYLINDER	1
PART NO.	QTY	DESCRIPTION	ITEM
IDENTIFICATION PER SPEC 42-311: ★ PERMANENT			
		HUCK INTERNATIONAL, INC., I.S.D CORPORATE OR KINGSTON, NEW YORK 12401	
ITAR/ECON: EAR99		3585 HUCK INSTALLATION TOOL -20/-24 FASTNER	
SCH B#: 8467.89.5090		FINAL ASSY: -	
HTS: 8467.89.5090		D	3585