Tool & Product Update

New Tool Release

MARKET RELEASE
Model 2012 Blind Rivet Tool

The Model 2012 Tool installs:

- *-04 through -06 dia. HUCK-CLINCH® including oversize HUCK-CLINCH*
- *-04 through -06 dia. UNIMATIC® blind rivets*
- *any other blind fasteners having a pinbreak of 2650 lbs , or less*

The 2012 is designed to install a high volume of fasteners with minumum operator fatigue.




The 2012 Tool's features include:

- In-line piston for one stroke high production applications
- Front wiper combined with POLY-SEAL (enhances sealing characteristics)
- 35 cycles per minute
- 4.4 lbs (2.0 kg) W/O nose assembly
- Ergonomically designed handle
- 360° swivel air inlet connection
- Plated piston rod for extended life and superior performance.
- Noise level 75 DBA @90 psi
- Stroke: .685 (nom); .650 min.
- Pulling capacity: 2670 lbs. @ 90psi

PATENT PENDING

continued on other side . . . .

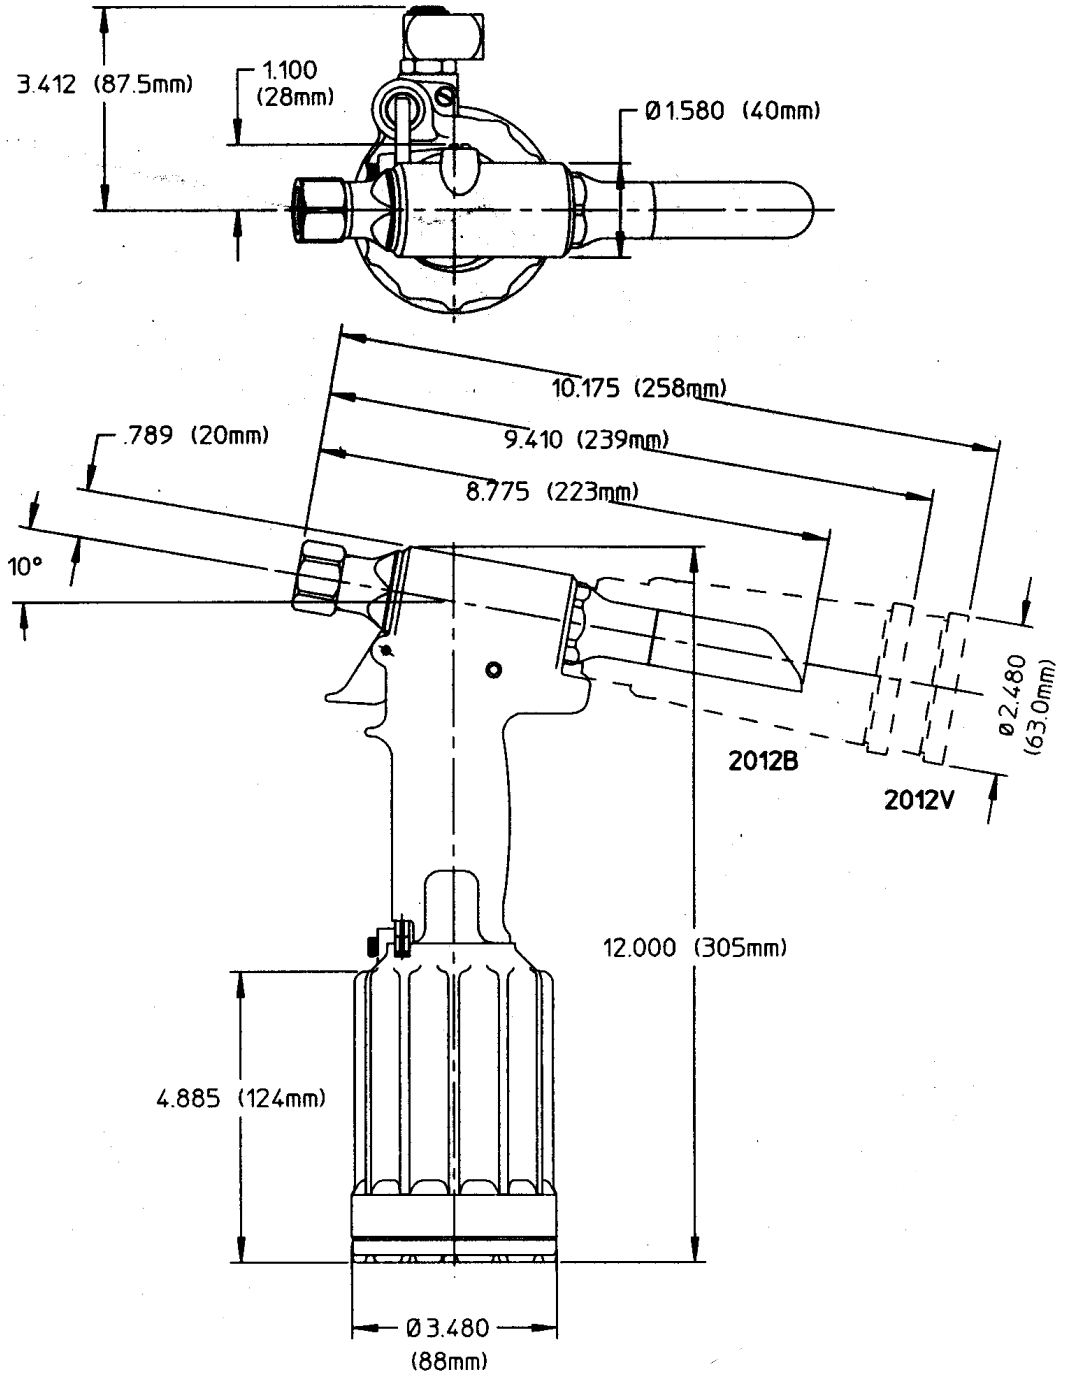

Accessory available:
Optional suspension spring (hanger), 124447

Tool models available:

- 2012 - - with pintail deflector
- 2012B - - with pintail collection bottle
- 2012V - - vacuum boost with pintail collection bottle