


C50L[®] Stainless Steel







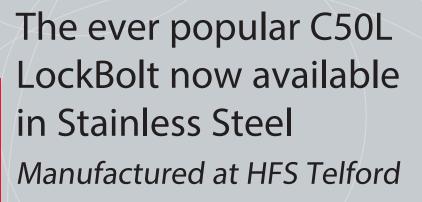

Dia (mm)	Tensile Kn	Shear Kn	Clamp Kn
12.7	75.8	61.8	53.6
15.9	120.5	93.4	85.4

Specification:

- Diameters Available 12.7mm (1/2") and 15.9mm (5/8")
- Grip: Standard C50L grips up to Grip 24 for 12.7mm and Grip 40 for 15.9mm
- Headstyle: Standard C50LR round head, other headstyles available on request
- Collar: Flanged (3LC) and Standard (LC) collar types
- Pin Material: 300 Series, other materials available on request
- Collar Material: 400 Series, other materials available on request
- Surface Treatment: Passivated

For MOQ and lead time information contact Telford Customer Service

www.hfsindustrial.com | enquiries@hfsindustrial.com

E&OE. All information is correct at time of production. HFS reserves the right to makes changes without prior notice. Please note, installing stainless steel LockBolts wears the nose assembly anvil more than other materials.